


APPLICATION

Anchor slings are exclusively designed for anchoring a personal fall protection system (for example a reel of rope with a stopfor™ fall arrester).

Anchor slings comply with standard EN795 type B for transportable temporary anchorage devices. They are used to create an anchorage point on a structure which provides sufficient resistance (> 13 KN).

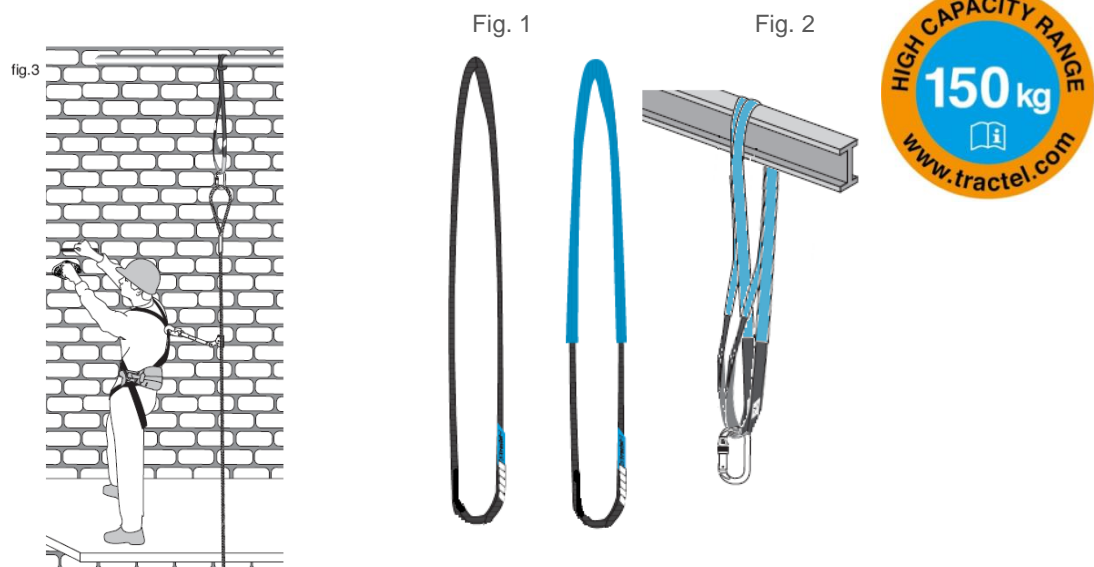

CARACTERISTIQUES TECHNIQUES

- Temperature - 30° C à + 60° C.
- Material : polyester

DESCRIPTION

The anchor slings are available in two versions:

- A lightweight version (fig.1), which is available in different lengths: 0.6 to 2m. The sling is made of 19 mm stitched polyester webbing.
- The anchor slings can be reinforced with a tubular sheath (fig.2). The sheath provides optimum protection against cuts and abrasion. Tractel® recommends the reinforced version as it provides a level of reliability and durability which is compatible with conditions encountered on building sites.

NORMES

- CE type examination certificate issued by Apave in accordance with standard EN 795 type B/2012 and CENTS16415/2013.

CODE	DESIGNATION	EAN CODE
81412	AS19S 0.6 GA 150Kg	3600230814124
81422	AS19S 0.8 GA 150Kg	3600230814223
81432	AS19S 1 GA 150Kg	3600230814322
81442	AS19S 1.2 GA 150Kg	3600230814421
81452	AS19S 1.5 GA 150Kg	3600230814520
81462	AS19S 2 GA 150Kg	3600230814629
38382	AS19S 0.6 150Kg	3600230383828
38392	AS19S 0.8 150Kg	3600230383927
38402	AS19S 1 150Kg	3600230384023
80842	AS19S 1.2 150Kg	3600230808420
80852	AS19S 1.5 150Kg	3600230808529
72152	AS19S 2 150Kg	3600230721521